

## ES2A~ES2J

### 2.0Amp Super Fast Recovery Surface Mounted Rectifiers

#### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Idea for printed circuit board
- ◆ Glass passivated Junction chip
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed 250°C/10 seconds at terminals

#### Mechanical Data

**Case :** Molded plastic body


**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Polarity symbol marking on body

**Mounting Position :** Any

**Weight :** 0.0035 ounce, 0.098 grams

#### DO-214AA/SMB

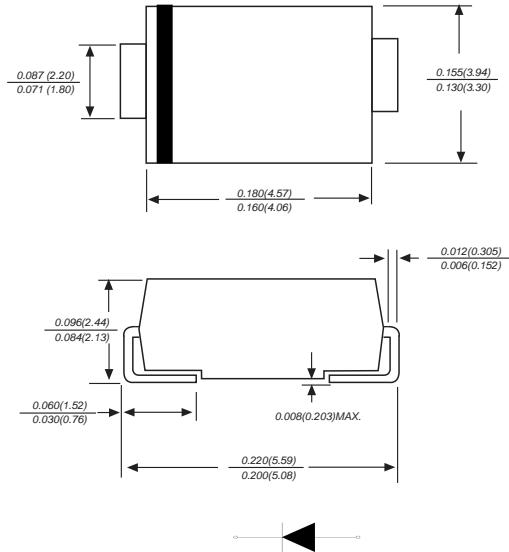

Dimensions in inches and (millimeters)

#### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz,resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	ES2A	ES2B	ES2C	ES2D	ES2F	ES2G	ES2J	UNITS		
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	150	200	300	400	600	V		
Maximum RMS voltage	V <sub>RMS</sub>	35	70	105	140	210	280	420	V		
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	150	200	300	400	600	V		
Maximum average forward rectified current at T <sub>L</sub> =100°C	I <sub>(AV)</sub>	2.0						A			
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	50.0						A			
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>	0.95			1.25		1.7	V			
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =125°C	I <sub>R</sub>	5.0 500						uA			
Maximum reverse recovery time(Note 1)	T <sub>rr</sub>	35						ns			
Typical junction capacitance (Note2)	C <sub>J</sub>	55.0						pF			
Typical thermal resistance	R <sub>qJA</sub>	85.0						°C/W			
Operating junction and storage temperature range	T <sub>J,T<sub>STG</sub></sub>	-55 to +150						°C			

**Note:** 1.Reverse recovery time test condition: IF=0.5A IR=1.0A Irr=0.25A

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

## Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

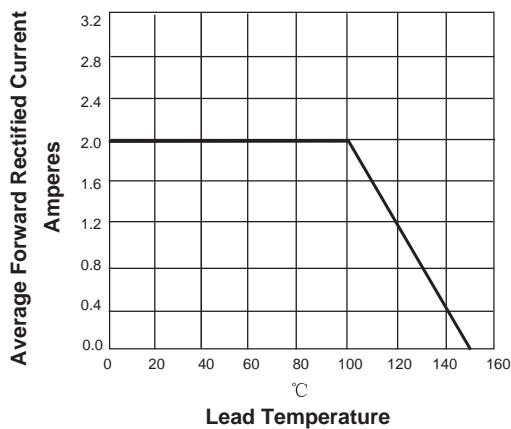


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

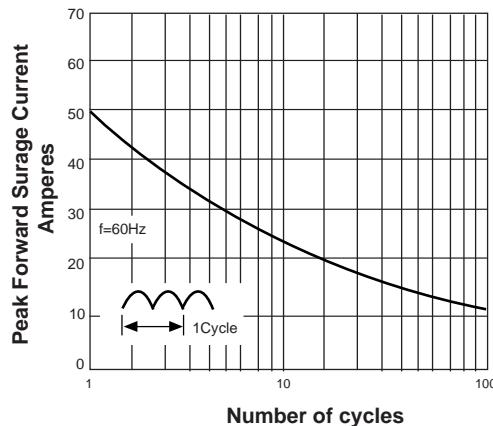


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

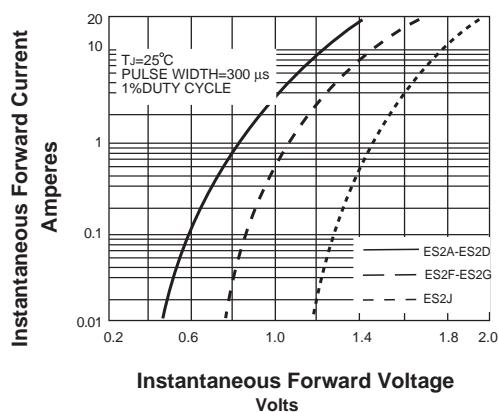


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

